

CAMSO WHL 776R

FORMERLY SOLIDEAL SRLS



WHEEL LOADERS



SOLID HARD SURFACE DURABILITY

The ideal solid tire solution for flat-free, hard-surface operation on skid steer loaders. Built to maximize tire life while providing excellent stability for primarily indoor, hard-surface operations.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WHL 776R



EXTRA-DEEP L5 SMOOTH TREAD

- Best durability and resistance to flat tires for extreme hard surface applications

FLAT TREAD PROFILE

- Provides enhanced stability and even wear

HEAVY-DUTY SIDEWALL CONSTRUCTION

- Provides excellent stability and enhanced loading capability


ROBUST DUAL-STAR CARCASS

- Protects against side impacts and deformation under heavy load

TIRE SIZE	TYPE	RIM SIZE	TIRE DIMENSIONS			APPLICATION	SI	LI	INFLATION PRESSURE [KPa] [PSI] AND LOAD CAPACITY [kg] [lb]										
			O.D. [mm]	O.W. [mm]	O.T.D. [mm]				KPa	200	250	300	350	400	450	500	550	600	650
			[in]	[in]	[32nd]				PSI	29	36	44	51	58	65	73	80	87	94
17.5R25	TBLS	14.00/1.5	1402	443	75	Loader*/**	A2	176/182	kg	3650	4250	4850	5600	6000	6500	7100*	7500	8000	8500**
			55.2	17.4	94.7				lb	8050	9350	10700	12300	13200	14300	15700*	16500	17600	18700**
23.5R25	TBLS	19.50/2.5	1673	623	80	Loader*/**	A2	195/201	kg	6000	7100	8250	9250	10300	11200	12150*	12850	13600	14500**
			65.9	24.5	100.8				lb	13200	15700	18200	20400	22700	24700	26800*	28300	30000	32000**
26.5R25	TBLS	22.00/3.0	1785	709	86	Loader*/**	A2	202/209	kg	7500	9000	10300	11500	12850	14000	15000*	16000	17000	18500**
			70.3	27.9	108.3				lb	16500	19800	22700	25400	28300	30900	33100*	35300	37500	40800*



CONTACT PRESSURE CHART

(Applies to 26.5R25 tire)

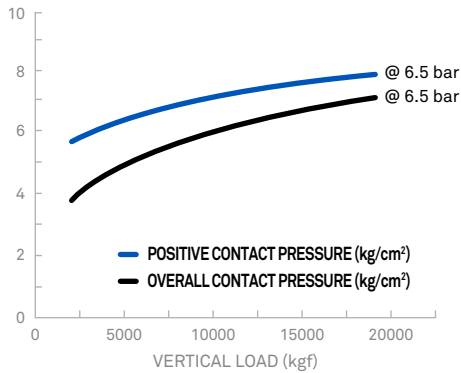

FOOTPRINT DIMENSION CHART

(Applies to 26.5R25 tire)

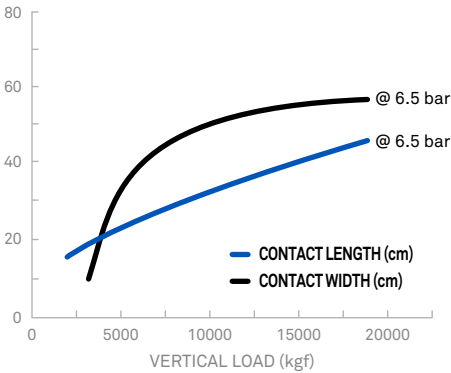

The Camso WHL 776R has a full, flat tread profile for enhanced stability, even wear and low contact pressure.

AUTHORIZED DISTRIBUTOR:

camso.co

